



Client: TIGF

### Project Brief

- ▶ Project: Vents and Flares upgrade (EPC Contract)
- ▶ Location: Lussagnet, France
- ▶ Duration: 24 months
- ▶ Team: Up to 25 Technicians



### Scope of Work


EPC Contract for the Underground Gas Storage Facility upgrade and modification of the emergency gas bleed off system at Lussagnet (25% of France's gas storage capacity)  
Dismantling of existing system  
Shop prefabrication of three 30 meter long vents (base Ø 64")  
Project works including :  
Civil work and concrete base for the vents  
Piping installation  
Electrical systems installation  
Instrumentation system  
Pre-commissioning and Commissioning activities

### Major Achievements

Successful execution of project with no disturbance to the operations of the storage center

Piping and structural scopes performed on site:

- 4 000 m of pipe from 30" to 1/2" welded on site with supports
- 2020 m<sup>3</sup> of concrete, 18 600 m<sup>3</sup> of earth
- 17 km of cables

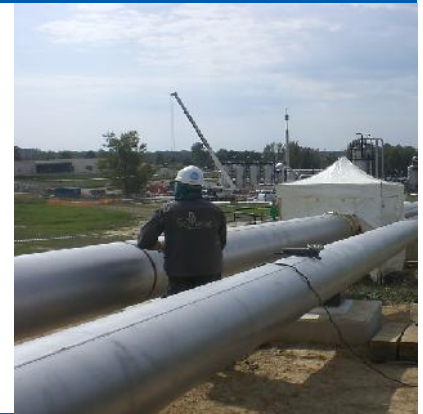

For more details please contact: [info@3cmetalme.com](mailto:info@3cmetalme.com)